


# TECHNICAL DATA SHEET

## PEDESTAL STAR.T+Tab

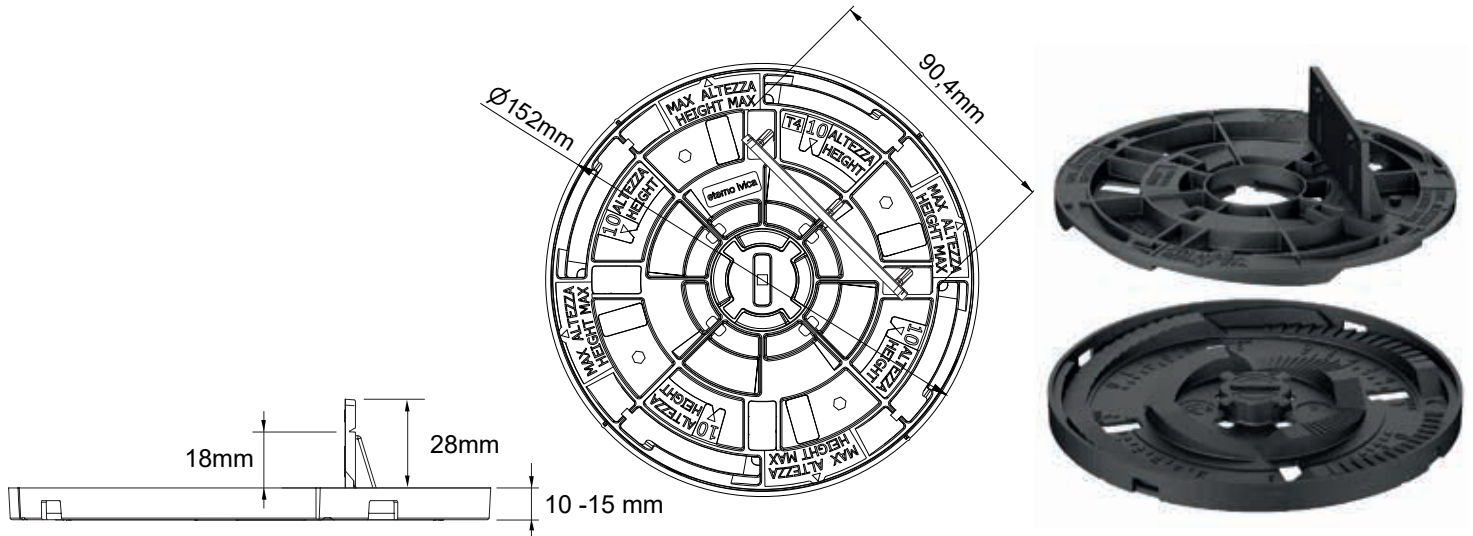

### TECHNICAL SPECIFICATION

Supply and installation of supports for raised floors "STAR.T + STAR-T Tab".

The supports are composed of two polypropylene elements with a diameter of 152mm and an adjustable height from 10mm up to 15mm, in the upper part there is a fracturable flap h 28mm where to tighten the fixing screws.

In the base there are holes for the outflow of water. There are housings for various accessories and a hole for the adjustment key.

By using the special STAR.T extension, it is possible to reach a maximum height of 30mm.

### CHARACTERISTICS:

- Minimum height 8mm with only upper body used
- Minimum height with also using the base 10mm
- Height adjustable up to 15mm
- Prepared for use with extensions having a height of 5mm
- Holes for water drainage
- Hole for inserting adjustment wrench
- N°1 pre-cut tab, min height 18mm, MAX height 28mm, with slotted holes for fixing screws
- Wooden joists compatibility

### RAW MATERIAL:

Polypropylene

### ENVIRONMENTAL IMPACT:

recyclable material - not dangerous

### APPLICATIONS SURFACES:

- On any waterproofing membrane
- On any insulating hard panel
- On any compact and solid surface

### APPLICATIONS AREA:

Can be used with any prefabricated self supporting element for outdoor flooring, with a minimum thickness of 15mm

### GENERAL CHARACTERISTICS & PROPERTIES

	UNIT	VALUE	TOLERANCE +/-
<b>BASE DIAMETER</b>	mm	152	+/- 1.0
<b>BASE THICKNESS</b>	mm	2	+/- 0.2
<b>SURFACE OF THE BASE</b>	cmq	182	+/- 5
<b>MAX PRE-CUT TABS HEIGHT</b>	mm	28	+/- 0.1
<b>min PRE-CUT TABS HEIGHT</b>	mm	18	+/- 0.1
<b>SHORE</b>	Shore d	70	+/- 3



# TECHNICAL DATA SHEET

## PEDESTAL *STAR.T+Tab*

### ITEMS CHARACTERISTICS & PROPERTIES

<b>STAR.T_E003010015</b> <b>Aletta STAR-T_E003920100</b>	UNIT	VALUE	TOLERANCE
min HEIGHT	mm	10	+/- 1,0
MAX HEIGHT	mm	15	+/- 1,0
WEIGHT	kg	0.096	+/- 5 %
MAX CENTRAL COMPRESSION LOADING RESISTANCE*	kN	35.53	/

PACK/STORAGE	
PIECES PER BOX	100
BOXES PER PALLET	54
BOX DIMENSION	40x40x24cm
BOX WEIGHT	10kg
PALLET	80x120cm
PCS PER PALLET	5400

\*Tests made by Civil and Environmental Department of University of Padova. 1 kN = 98,6 kg

The packaging of the supports consists of cardboard boxes. The final packaging of the pallets is made with the wrapping of a polyethylene film. Indoor storage, protected from precipitation, is recommended.

### INSTALLATION METHOD

The product is laid dry, without the need for adhesives or other types of fixings.

The above data are relevant to current production and may be changed or updated by Eterno Ivica at any time without notice. Given the many possible uses and the possible interference of external elements, we do not assume responsibility for the results. The buyer is required to establish under their own responsibility the suitability of the product for the intended use. This document is property of Eterno Ivica. All rights reserved.